




ACCURATE

RELIABLE

DURABLE

AMTAB WEIGHING IN MOTION

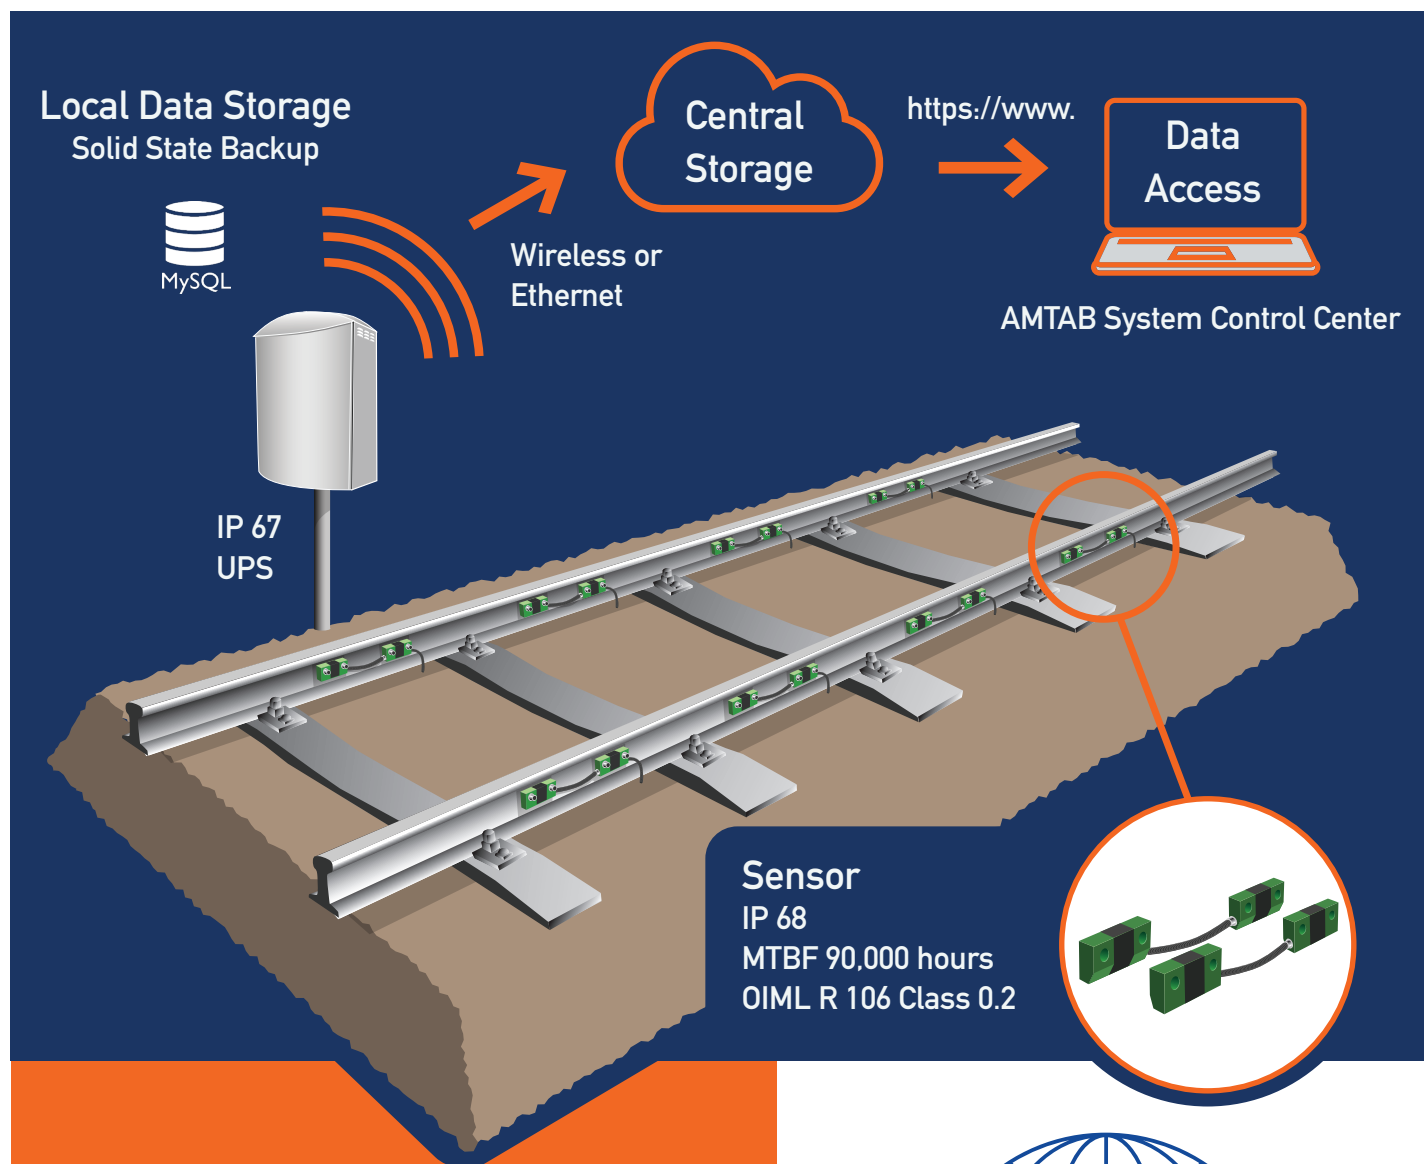

No traffic interruption during installation
No infrastructural changes needed
Fast installation (only 10-12 hours)
Overall best cost / performance
MTTR less than 1 hour



 **MADE IN SWEDEN** 
MADE IT TO AUSTRALIA

www.amtab.se



ACCURATE RELIABLE DURABLE

TECHNICAL SPECIFICATIONS

WIM SYSTEM CABINET

DIMENSIONS (H x W x D)	850 x 690 x 360 mm
INNER ENCLOSURE (H x W x D)	590 x 560 x 280 mm
SHIPPING WEIGHT (W. SENSORS)	100 kg
ENVIRONMENT PROTECTION	IP67
OPERATING TEMPERATURES	-30°C to 80°C
POWER	100 - 240 VAC, 50 - 60 Hz, 6A
CONSUMPTION (W. HEATER)	90 W (190 W)
UPS CAPACITY (TIME)	12 V, 7 Ah (approx. 50 min. @ 90 W)
ACCURACY	±1.0 - 0.2% depending on configuration
MEASUREMENT RANGE	3.0 - 32.5 ton per axle
CLASSIFICATION	OIML R 106
GRAPHICAL USER INTERFACE	Built-in web-based interface
COMMUNICATION INTERFACES	USB, RS-232, RS-485, TCP/IP 10/100Base-T Ethernet
STORAGE	CompactFlash® card / External MySQL™ Database (optional)

MULTI-FUNCTIONAL SENSOR BAR (MFSB)

DIMENSIONS (H x W x D)	47 x 90 x 22 mm
SHIPPING WEIGHT	1.7 kg
ENVIRONMENT PROTECTION	IP68
OPERATING TEMPERATURES	-30°C to 80°C
MTBF	90,000 hours